

EXPLODED VIEW

GRINDER DOSER
ROYAL




ESRLDOS03.01 09/2009



MAZZER LUIGI s.r.l
VIA MOGLIANESE, 113
30030 GARDIGIANO DI SCORZE' (VE)
ITALIA
TEL. +39 041 5830200 r.a. - FAX +39 041 5830060
E-mail: mazzler@mazzler.com - <http://www.mazzler.com>

N.	DESCRIPTION	CODE	Q.	NOTES
1	Hopper cover	S000COD01	1	
2	Magnet with ring	S00SCAC01	-	Optional
3	Label "Caution Hopper"	S000ETA15	1	110V/60Hz versions 220V/60Hz versions
4	Major/Robur complete Hopper set	S00SCAE03	1	(hopper + adapter + pin)
5	Robur collar locking slide	S000SEB02	1	
6	Safety switch	S000INR01	1	
7	Label: Motor rotation	S000ETA00	1	
8	Gasket	S000GUA01	1	
9a	Automatic doser	SMJSGRL05	1	Automatic versions
9b	Automatic doser - ETL	SMJSGRE05	1	Automatic versions
10a	Pilot light 230/400V - green	S000LAA06	1	220-240V/50Hz single phase vers. 230-400V/50Hz three phase vers. 220V/60Hz single phase versions
10b	Pilot light 110V UL - red	S000LAA07	1	110V/60Hz versions
11	Fork for filterholder rest	S000FOB02	1	
12	Doser fixing block ETL	S000PIA10	1	110V/60Hz versions
13	"Mazzer 4M" plate	S000TAA02	1	
14	Body	SRLOCAA04	1	
15	Label: "Caution"	-	1	110V/60Hz versions 220V/60Hz versions
16a	Two pole rotative switch with auxiliary phase	S000INA13	1	Automatic single phase versions
16b	Three pole rotative switch with auxiliary phase	S000INA10	1	Automatic three phase versions
17	Switch plate - O / I / START	-	1	Automatic versions
18	Rotative switch knob	-	1	
19	Motor label	-	1	
20	Drip tray	SMJ0PIB02	1	
21	Label: Coarse - fine / Adjustment initial position	S000ETA03	1	
22	Coffee grinding adjustment disk - Major	SMJ0GHA04	1	
23	Upper grinding blade holder Major/Royal/Stark	SRL0POA06	1	
24	Grinding adjustment spring	SSJ0MOB01	4	
25	Grinding adjustment disk handle	SSJSPEA04	1	
26a	Grinding blade set rif. 151B	FMA00151B	1	Single phase versions
26b	Grinding blade set rif. 151C	FMA00151C	1	Three phase versions
27	Lower grinding blade holde Major/Royal	SMJ0POA07	1	
28	Major cover bearing	SMJ0COA02	1	
29	Bearing 6204 DDU CM	S000CUA04	2	
30	Ring O.R.- SEAL 4462 NB70	S000ANA03	1	
31	Grinding tray for Royal	SRL0BAA01	1	
32	Major cooling fan	SMJ0VEA01	1	
33	Fixing ring Royal fan	SRL0ANA01	1	
34	Royal/Stark rotor	SSK0ROA02	1	
35a	Royal/Stark coiled stator-single phase 220-240V/50Hz	SRLSPA01	1	220-240V/50Hz single phase vers.
35b	Royal/Stark coiled stator-three phase 230-400V/50Hz	SRLSPA03	1	230-400V/50Hz three phase vers.
35c	Royal/Stark coiled stator-single phase 110V/60Hz	SRLSPA08	1	110V/60Hz single phase versions
35d	Royal/Stark coiled stator-single phase 220V/60Hz	SRLSPAS01	1	220V/60Hz single phase versions
36	Lower motor cap Robur/Royal	SRLOCAB01	1	
37	Fun "80 B-Y"	S000VEA04	1	
38	Fan fixing clamp	S000FAA01	1	
39	Fan cover	SSK0COV01	1	
40	A20x8,5 M vibration damping	S000ANV04	3	
41	Spacer	SRL0DIS01	3	
42	Motor plate Robur/Royal	SRL0PIA01	1	
43	Air conveyor	SRL0CON01	1	
44	Terminal blocks	S000MOA04	1	12 poles
45	Under terminal board	S000SOT02	1	12 poles
46	Nut for cable locking PG11	S000DAA02	1	
47	Royal bottom plate	SRO0PIN02	1	
48	DD 2015 H support leg	P000PIA04	4	
49	Label: "Danger"	S000ETA14	1	110V/60Hz versions 220V/60Hz versions
50	"Ground" plate	S000TAA18	1	
51	"External unipotential clamp" plate	S000TAA19	1	CE versions
52a	Electric cable "Italy" single phase	S000CAD01	1	230V/50Hz single phase vers.
52b	Electric cable - three phase 220-230V	S000CAD09	1	200-230V three phase vers.
52c	Electric cable - three phase 380-400V	S000CAD03	1	380-415V three phase vers.
52d	Electric cable "Europe"	S000CAD04	1	230V/50Hz single phase vers. 220V/60Hz single phase vers.
52e	Electric cable "USA"	S000CAD05	1	110V/60Hz single phase vers.

N.	DESCRIPTION	CODE	Q.	NOTES
52f	Electric cable "Australia"	S000CAD07	1	
52g	Electric cable "Great Britain"	S000CAD08	1	
52h	Electric cable "Israel"	S000CAD10	1	
52i	Electric cable "Switzerland"	S000CAD06	1	
52l	Electric cable "China"	S000CAD16	1	
52m	Electric cable "Argentina"	S000CAD18	1	
52n	Electric cable "Korea"	S000CAD19	1	
53	Flexible Cable locking PG11 black	S000PAB04	1	
54	Cable locking support	S000SUA01	1	
55	Strap RELF 170 black	S000FAS06	1	Single phase versions
56a	Capacitor 16uF	S000COE03	1	220-240V/50Hz single phase vers. 220V/60Hz single phase vers.
56b	Capacitor 60uF UL	S000COE09	1	110V/60Hz single phase vers.
57a	Contactora BF16.10 - 230V/50Hz	S000COC12	1	220-230V/50Hz single phase vers. 230V/50Hz three phase vers.
57b	Contactora BF16.10 - 240V/50Hz	S000COC14	1	230-240V/50Hz single phase vers. 240V/50Hz single phase vers.
57c	Contactora BF16.10 - 110V/60Hz	S000COC10	1	110V/50Hz single phase vers.
57d	Contactora BF16.10 - 220V/60Hz	S000COC17	1	220V/60Hz single phase vers.
57e	Contactora BF16.10 - 380V/50Hz	S000COC13	1	380V/50Hz three phase vers.
57f	Contactora BF16.10 - 415V/50Hz	S000COC22	1	415V/50Hz three phase vers.
58	Wirings for upper and lower microswitch	S00SCAB01	1	

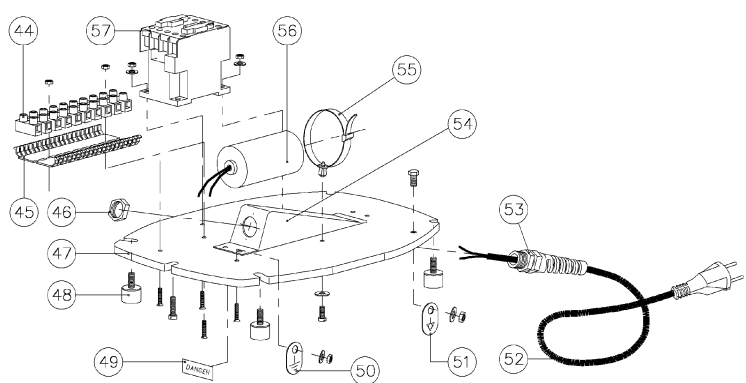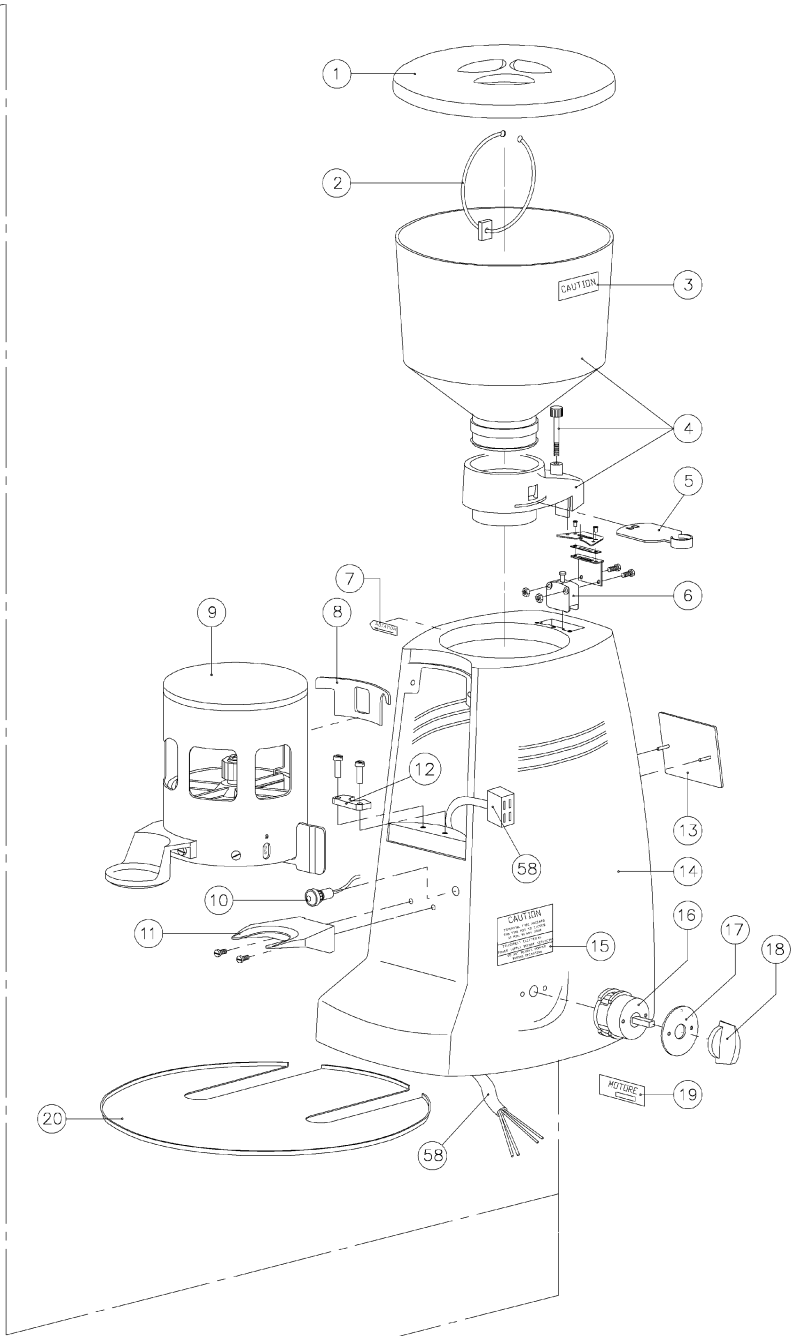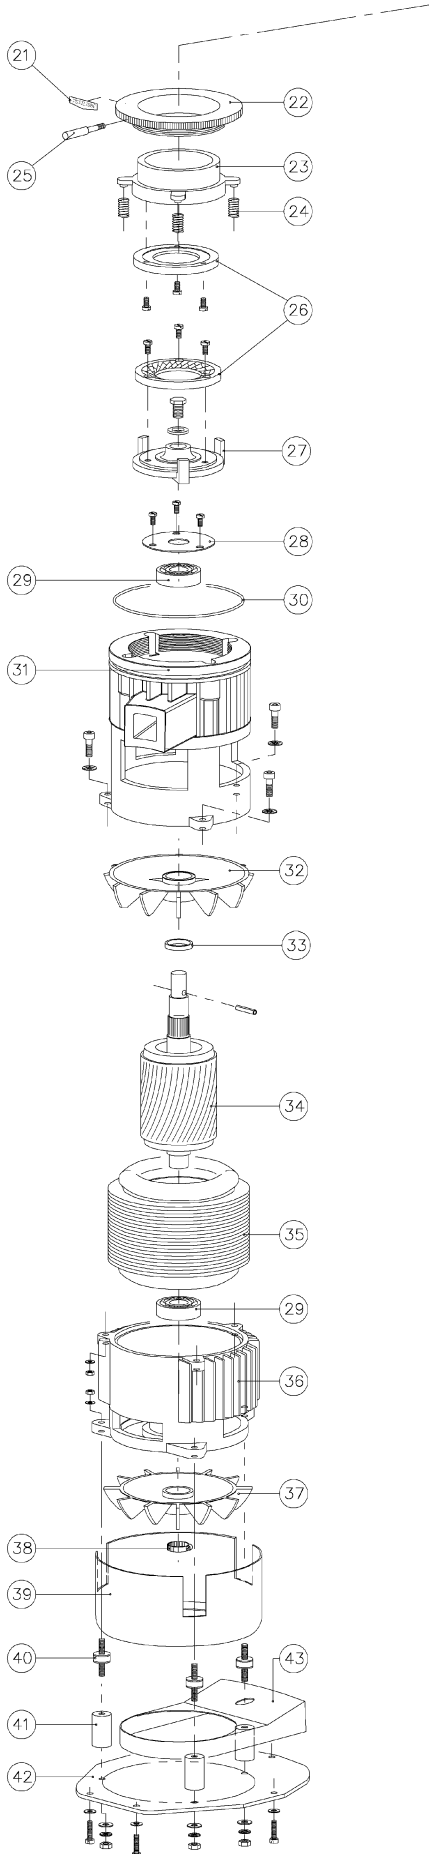

N.	DESCRIPTION	CODE	Q.	NOTES
1	Doser cover	S000COD02	1	
2	Cylinder for doser	S000CIA03	1	
3	Dose adjustment knob	S000MAB02	1	
4	Upper dosing star	SMJSSTA04	1	
5	Coffee outlet covering section plate	S000SEA01	1	
6	Female dosing star	S000STA03	1	
7	Dosing system pressing spring	S000MOB05	1	
8	Male dosing star	S000STA02	1	
9	Upper microswitch	S00SMIA07	1	
10	Doser pipe	SMJOTUA04	1	
11a	Coffee pressing device D.53	S000PRA02	1	
11b	Coffee pressing device D.54,5	S000PRA02	1	
11c	Coffee pressing device D.57,5	S000PRA02	1	
12	Corrugated ring D.32	S000ANA01	1	
13	Ratchet	S000CRA02	1	
14	Doser adjustment screw - M8x70	S000VIA01	1	
15	Lower microswitch spring	S000MOB06	1	
16	Lower microswitch star	S000STA05	1	
17	Lower microswitch	S00SMIA04	1	
18	Counter	S00SCOB02	1	
19	Dosing lever return spring	S000MOB03	1	
20	Nose	S000NAA01	1	
21	Doser bottom	S000FOA03	1	
22	Nose spring	S000MOB04	1	
23	Dosing lever	S00SLEA02	1	
24	Doser bottom set	S00SFOA01	1	
25	Coffee outlet guard	S000PRB02	1	
26	Screw without slot	S000VIA04	2	ETL versions
27	Doser washer D.50 thick. 0,4	S000ROA02	1	
28	Lower microswitch star space	S000DIA01	1	
29	Label "Danger"	S000ETA14	1	110/60Hz versions 220V/60Hz versions
30	Oversized female dosing star	S000STA06	1	
31	Oversized dose adjustment knob	S000MAB03	1	
32	Oversized star with dosing knob	S00SGRA08	1	

